

# vtech®

Innovation Beyond Technology™



## User's manual

[www.vtechphones.com](http://www.vtechphones.com)

Models:  
LS6117/LS6117-12/  
LS6117-15/LS6117-19

**DECT 6.0**

# **Congratulations**

on purchasing your new VTech product.  
Before using this telephone, please read the  
**Important safety instructions**  
on page 34 of this manual.

This manual has all the feature operations and troubleshooting necessary to install and operate your new VTech telephone. Please review this manual thoroughly to ensure proper installation and operation of this innovative and feature rich VTech product. For support, shopping, and everything new at VTech, visit our website at [www.vtechphones.com](http://www.vtechphones.com).

In Canada, please visit [www.vtechcanada.com](http://www.vtechcanada.com).



The ENERGY STAR® program ([www.energystar.gov](http://www.energystar.gov)) recognizes and encourages the use of products that save energy and help protect our environment. We are proud to mark this product with the ENERGY STAR® label indicating it meets the latest energy efficiency guidelines.

# Table of contents

<b>Getting started</b> . . . . .	<b>1</b>	Find handset . . . . .	13
Parts checklist . . . . .	1	Chain dialing . . . . .	14
Telephone base installation . . . . .	2	Directory . . . . .	15
Battery installation and charging . . . . .	3	Store a directory entry . . . . .	16
Install an image. . . . .	5	Character chart . . . . .	17
Handset layout . . . . .	6	Search the directory . . . . .	18
Telephone base layout . . . . .	7	Dial a directory entry . . . . .	18
<b>Telephone settings</b> . . . . .	<b>8</b>	Edit a directory entry . . . . .	19
Ringer volume . . . . .	8	Delete from the directory . . . . .	20
Ringer tone . . . . .	9	About caller ID . . . . .	21
Key tone . . . . .	10	Call log . . . . .	22
Language . . . . .	10	Missed calls indicator . . . . .	23
Clear voicemail . . . . .	11	Review the call log . . . . .	23
<b>Telephone operation</b> . . . . .	<b>12</b>	Make a call log entry ready to dial . . . . .	24
Make a call . . . . .	12	Dial a call log entry . . . . .	24
Answer a call . . . . .	12	Save an entry to the directory . . . . .	25
End a call . . . . .	12	Delete from the call log . . . . .	26
Mute . . . . .	12	Call log display screen messages . . . . .	27
Ringer mute. . . . .	13	Redial list . . . . .	28
Call waiting . . . . .	13	Dial a redial entry . . . . .	28
Volume . . . . .	13	Delete from redial. . . . .	28

# Table of contents

<b>Appendix</b> . . . . .	<b>29</b>
Handset display screen messages . . . . .	29
Handset and telephone base indicators . . . . .	31
Battery . . . . .	33
Important safety instructions . . . . .	34
Troubleshooting . . . . .	35
Operating range . . . . .	44
Maintenance . . . . .	44
About cordless telephones . . . . .	45
The RBRC® seal . . . . .	45
Warranty . . . . .	46
FCC, ACTA and IC regulations . . . . .	48
Technical specifications . . . . .	50
Index . . . . .	51

# Getting started

## Parts checklist

Your telephone contains the following items. Save your sales receipt and original packaging in the event warranty service is necessary.



1. Images



2. Handset



3. Transparent image cover



4. Battery compartment cover




5. Battery




6. Telephone line cord



7. Telephone base power adapter



8. Telephone base



9. User's manual

### note

- To purchase a replacement battery or power adapter, visit our website at [www.vtechphones.com](http://www.vtechphones.com) or call 1 (800) 595-9511. In Canada, go to [www.vtechcanada.com](http://www.vtechcanada.com) or call 1 (800) 267-7377.


## note

- Use only the power adapter supplied with this product. To order a replacement, visit our website at [www.vtechphones.com](http://www.vtechphones.com) or call 1 (800) 595-9511. In Canada, go to [www.vtechcanada.com](http://www.vtechcanada.com) or call 1 (800) 267-7377.
- The power adapter is intended to be correctly oriented in a vertical or floor mount position. The prongs are not designed to hold the plug in place if it is plugged into a ceiling or an under-the-table/cabinet outlet.

## Getting started

### Telephone base installation

Install the telephone base as shown below. The telephone base is designed for desk or tabletop use only. Make sure that the electrical outlet is not controlled by a wall switch. If you subscribe to Digital Subscriber Line (DSL) high-speed Internet service through your telephone line, you must have a DSL filter between the telephone base and the telephone wall jack. The filter prevents noise and caller ID problems caused by DSL interference. Please contact your DSL service provider for more information about DSL filters.

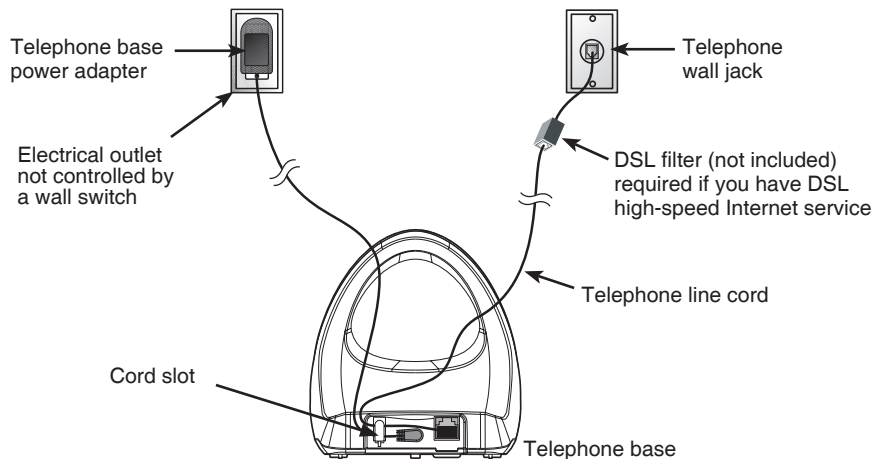

## Getting started

### Battery installation and charging

1. Perform steps 2 through 5 if the transparent image cover is attached. If the transparent image cover is off, go to step 6.
2. Remove the transparent image cover by holding the handset in your right hand with the back facing up and the **CHARGE** light to the left as shown in Figure 1.
3. Push the top center of the transparent image cover to the right with your left thumb until it unlocks.
4. Lift the transparent image cover away from the handset.
5. Remove the battery compartment cover by sliding it to the right as shown in Figure 2.
6. Match the color of the battery wires to the color-coded label located inside the handset compartment on the back of the handset, as shown in Figure 3.
7. Insert the battery plug securely onto the connector.
8. Place the battery in the compartment with the label **THIS SIDE UP** facing up and the wires inside the battery compartment as shown in Figure 4.
9. Replace the battery compartment cover by aligning the battery cover tabs with the slots in the battery compartment and sliding the cover towards the **CHARGE** light until it clicks into place.

**CHARGE** light



Figure 1:  
Remove image cover




Figure 2:  
Remove battery  
compartment cover




Figure 3:  
Insert battery plug



Figure 4:  
Insert battery

### note

- If the handset will not be used for a long time, disconnect and remove the battery to prevent possible leakage.
- To purchase a replacement battery, visit our website at [www.vtechphones.com](http://www.vtechphones.com) or call 1 (800) 595-9511. In Canada, go to [www.vtechcanada.com](http://www.vtechcanada.com) or call 1 (800) 267-7377.

## note

- The handset battery will charge if you place the handset in the telephone base with either the front or back facing out to show off the insert as shown in Figure 6.

## Getting started

10. If you wish to add an image to the transparent image cover, go to **Install an image** on page 5.
11. Replace the transparent image cover by placing it flat against the handset and sliding it towards the **CHARGE** light until it clicks into place as shown in Figure 5.
12. Charge the handset by placing it in the telephone base. The handset charge light will be on when correctly placed in the telephone base.

### Caution:

If the charge light does not come on, remove the handset from the telephone base and make sure that the transparent image cover is on correctly. The cover must click into place to be seated properly.


After installing the battery, you might be able to make and receive short calls. For best performance, charge the handset for at least 16 hours before use. When the battery power is low, the handset will beep; **LOW BATTERY** will be displayed and  will flash on the handset screen. Place the handset in the telephone base to charge the battery when not in use. See the table on page 33 for battery operating times.



Figure 5:  
Replace transparent image cover




Figure 6:  
Handset charging positions

## Getting started

### Install an image

1. Perform steps 2 through 9 of the **Battery installation and charging** procedure on page 3.
2. Use the enclosed template to cut the desired image so that it fits into the transparent image cover.
3. Place the selected image inside the transparent image cover.
4. Place the image face down inside the transparent image cover with the top of the image at the end with the large tab.
5. Replace the transparent image cover by placing it flat against the handset and sliding it towards the **CHARGE** light until it clicks into place as shown in the figure.
6. Charge the handset by placing it in the telephone base. The handset **CHARGE** light will be on when correctly placed in the telephone base.



### note

- You can also go to [www.vtechphones.com](http://www.vtechphones.com) and use the online tool to create your own custom graphic inserts.

# Getting started

## Handset layout

### MENU/SELECT

- Press to display the menu.
- When in the menu, press to select an item, or save an entry or setting.

### ▼ CID (Caller ID)

- Press to review the call log when the phone is not in use.
- While in the menu, press to scroll down.
- Press to lower the listening volume during a call.

### ( TALK/FLASH

- Press to make or answer a call.
- During a call, press to answer a second call when you hear a call waiting alert.

### MUTE

- While on a call, press to mute the microphone.

### REDIAL/PAUSE

- Press to review the redial list.
- While dialing or entering numbers into the directory, press and hold to insert a dialing pause.

### CHARGE light

- On when the handset is charging in the telephone base.

### ▲ (Directory)

- Press to display the directory when the phone is not in use.
- While in the menu, press to scroll up.
- Press to raise the listening volume during a call.

### OFF/CLEAR

- During a call, press to hang up.
- While the handset is ringing, press to silence the ringer.
- Press and hold when the phone is not in use to erase the **MISSED CALLS** display.
- During programming, press to return to the previous menu without making changes.

### #

- Press repeatedly to display other dialing options when reviewing the call log.

### REMOVE

- While reviewing the call log, press to delete an individual entry, or press and hold to delete the entire call log.
- Press to delete digits when predialing (entering the phone number before pressing ( TALK/FLASH).

